

# GRATE 32% OPEN AREA

MODEL # AG32G

- OPTIMIZED AIRFLOW
- HEAVY DUTY
- ALL STEEL

## GENERAL SPECIFICATIONS


- 24 inches square
- Panel weight: 19.5 lbs.
- Galvanized steel construction
- Class A flame spread rating
- Non-combustible material
- Panel height shall be: 1.39"
- Available with top-adjusting opposed blade damper
- Removable with grate lifting device

## COVERING


- Hammertone Grey Epoxy Powder Coat Finish

## COMPATIBLE SYSTEMS

- Most modern Steel and Concrete Filled Systems

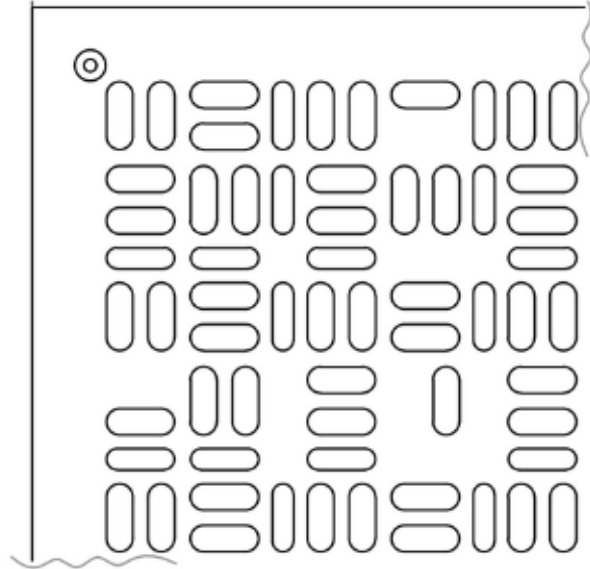

**BOTTOM DETAIL**

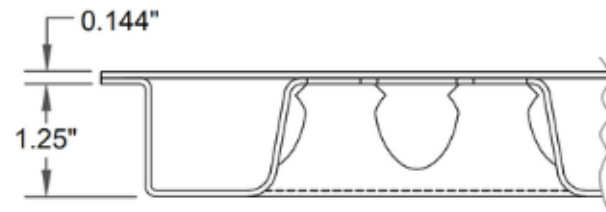

**CORNER DETAIL**

SYSTEM PERFORMANCE RATINGS*			
DESIGN LOAD	UNIFORM LOAD	ULTIMATE LOAD	IMPACT LOAD
<b>1500 lbs</b>	<b>800 lbs</b>	<b>4500 lbs</b>	<b>300 lbs</b>
ROLLING LOAD		WARRANTY	
10 PASSES <b>1500 lbs</b>	10 PASSES <b>1250 lbs</b>	<b>1 Year</b>	

\*Per CISCA Recommendations, Minimum