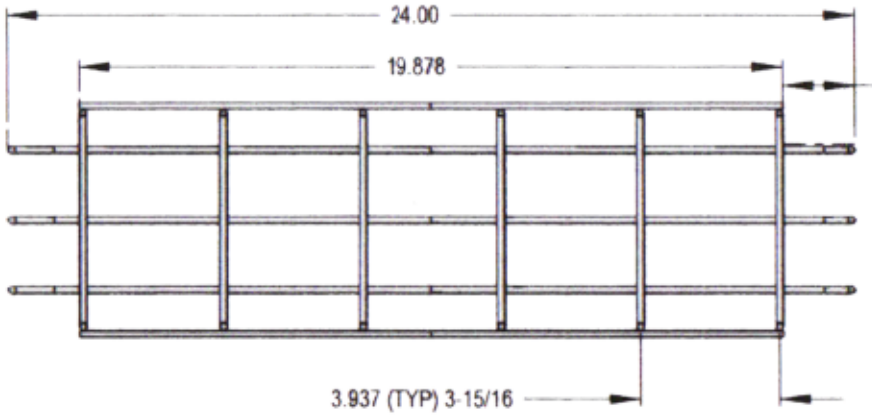


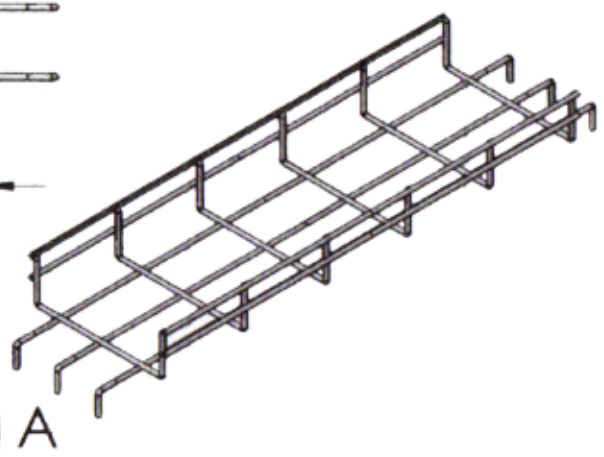


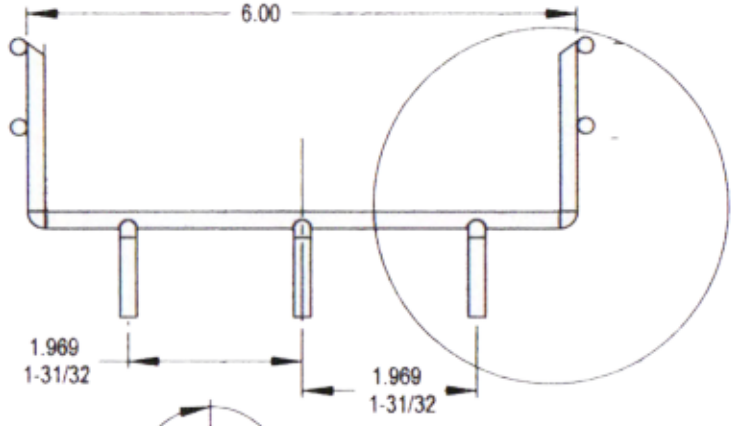


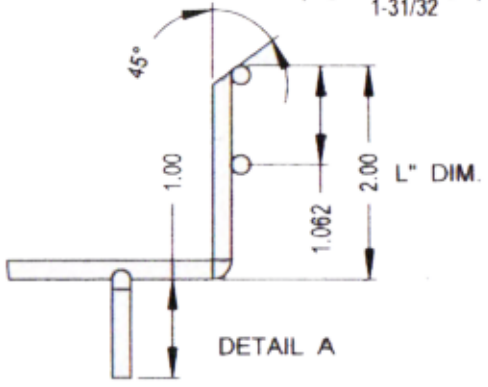


| COMPONENT LIST | | | |
|---|---|---|---|
| L" DIM. | ITEM | MAKE FROM | DESCRIPTION |
| | | P/N FT XX 6X24 | CO WIRE .196 DIA. |
| 2" | | 2X6X24 | |
| 4" | | 4X6X24 | |
| 6" | | 6X6X24 | |
| | | | |

GENERAL NOTES:

A) MATERIAL TO BE HOT DIPPED, PRE-GALVANIZED STEEL, ASTM A641, TO AVOID THE FORMATION OF ZINC WHISKERS.

B) FINISH:
1) POLYESTER POWDER COATING 1.2 - 3.0 MILS THICK.

C) DIMENSIONAL TOLERANCES
1) GENERAL DIMENSIONS +/- 1/8" U.N.O.
2) LENGTH +/- 1/4"
3) WIDTH +/- 1/8"
4) DEPTH +/- 1/8"
5) ANGULAR FORMATION +/- 3 DEG.
6) CAMBER SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH.
7) TWIST SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH

D) RIB VICE DIAMETER
1) .197 (5MM) DIAMETER.

E) LONGITUDINAL WIRE DIAMETER.
1) .197 (5MM) DIAMETER

F) CROSS SECTION AREA
AREA = (20 WIRES X .0438 IN2) = .876 IN2
UL MARKING = .8 IN2

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES

DEBUR AND BREAK SHARP EDGES

| REVISION | NAME | CHANGE | DATE |
|---|---|---|---|
| A | AF | | 3-27-10 |

MATERIAL:

WEIGHT:

accessfloor systems

985 898 0880

TITLE:

# FLOORFLEX-TRAY

DWG NO:

FT XX 6 X 24

SCALE: 1:1

SHEET 1 OF 1