



GENERAL NOTES

- A) MATERIAL TO BE HOT DIPPED, PRE-GALVANIZED STEEL ASTM A641, TO AVOID THE FORMATION OF ZINC WHISKERS.
- B) FINISH: [CARBON STEEL WIRE ONLY]
 - 1) POLYESTER POWDER COATING 1.2 - 3.0 MILS THICK.
- C) DIMENSIONAL TOLERANCES
 - 1) GENERAL DIMENSIONS +/- 1/8" U.N.D.
 - 2) LENGTH +/- 1/4"
 - 3) WIDTH +/- 1/8"
 - 4) DEPTH +/- 1/8"
 - 5) ANGULAR FORMATION +/- 3 DEG.
 - 6) CAMBER SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH.
 - 7) TWIST SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH.
- D) RIB VICE DIAMETER
 - 1) .197 (5MM) DIAMETER.
- E) LONGITUDINAL WIRE DIAMETER
 - 1) .197 (5MM) DIAMETER
- F) CROSS SECTION AREA
 - AREA = [20 WIRES X .0438 IN²] = 876 IN²
 - UL MARKING = 8 IN²

COMPONENT LIST			
L" DIA.	ITEM	MAKE FROM	DESCRIPTION
		P/N FT XX 24X48	CO WIRE .196 DIA.
2"		2X24X48	
4"		4X24X48	
6"		6X24X48	

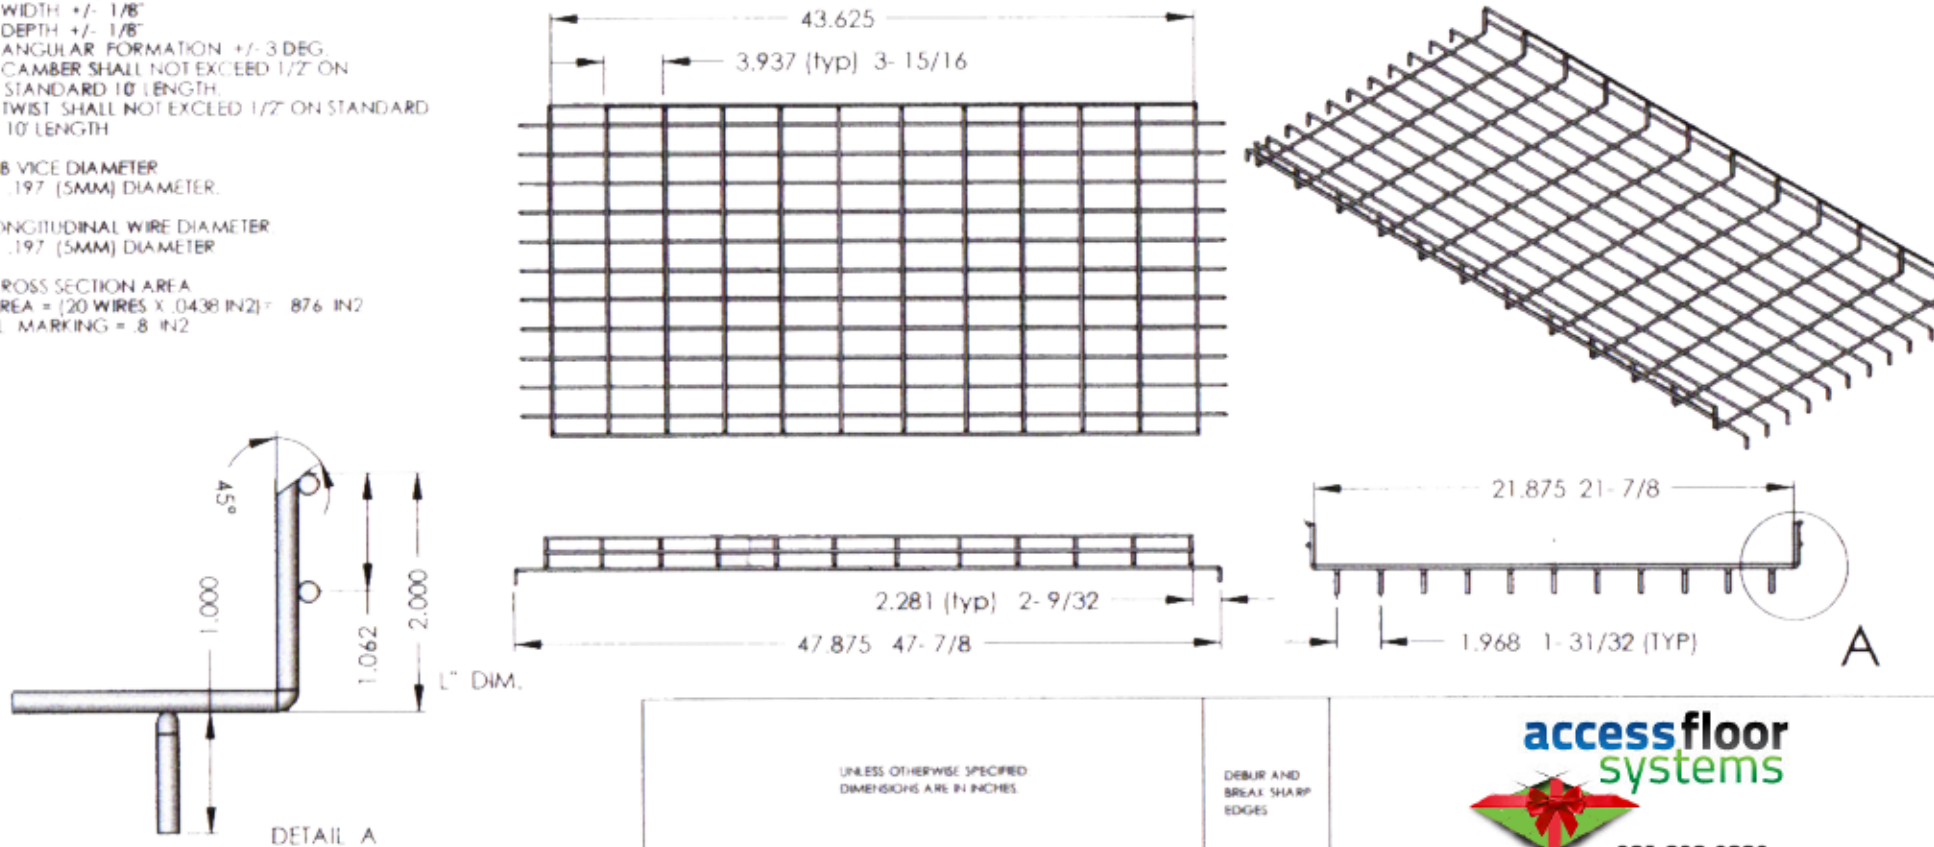

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.				DEBUR AND BREAK SHARP EDGES		 985 898 0880	
REVISION	NAME	CHANGE	DATE			TITLE	
A	AF		5-12-10			FLOORFLEX-TRAY	
				MATERIAL:		DWG NO.	
				WEIGHT:		FT XX 24 X 48	
						SHEET 1 OF 1	