

TOP VIEW

SPECIFICATIONS

- All steel construction
- Interchangeable with laminated ConCore® and All Steel panels
- 32% open area without damper
- Panel size: 24 inches square
- Panel weight: 4.875 lb./ft²
- Non-combustible material
- Class A flame spread rating
- Patented intermingled airflow vanes for directional airflow
- Supports up to 1250lb load
- Capture index of 90%

UNDERSTRUCTURE OPTIONS



- 4' bolted stringer system

COATING OPTIONS

- Smoke Grey anti-static powder coat finish

AIRFLOW OPTIONS

- Single-zone Opposed Blade Damper (field mounted)
- Multi-zone Opposed Blade Damper (field mounted)

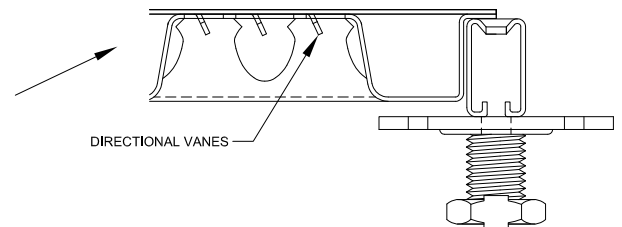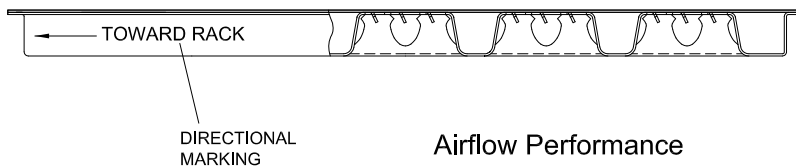

Airflow Performance

Static Pressure (In. H ₂ O)	Air Volume no damper (CFM)
0.02	535
0.04	735
0.05	820
0.06	880
0.08	1150
0.10	1285

Opposed Blade Damper


Air Volume w/ damper open (CFM)	Air Volume w/ damper closed (CFM)
505	195
725	260
785	280
875	305
1125	325
1250	355

FULL HARD COLD
ROLLED STEEL
TOP SHEET


POWDER COAT FINISH
INSIDE & OUT

ADDITIONAL OPENINGS IN
BOTTOM PAN

DRAW QUALITY STEEL
BOTTOM PAN

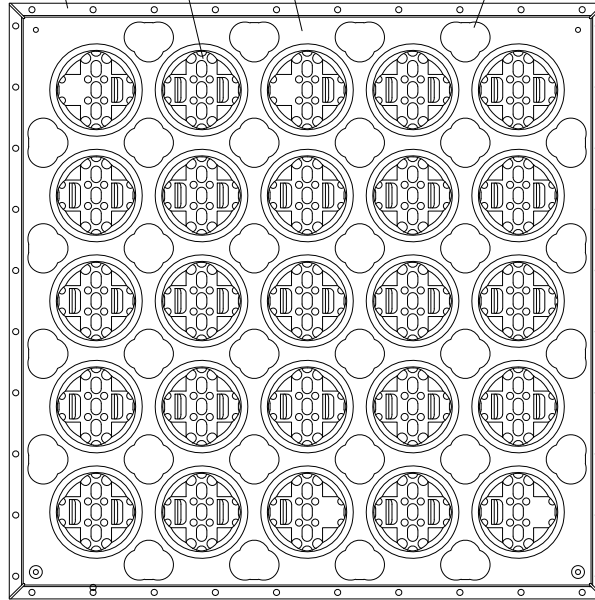

BOTTOM VIEW

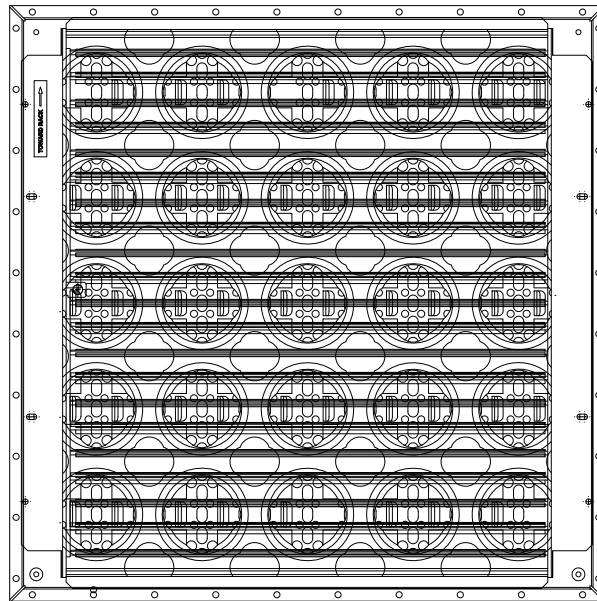

**BOTTOM VIEW WITH OPTIONAL
OPPOSED BLADE DAMPER**