


Airflow Panels & Controls

DirectAire® AL



Strong, Efficient, High Capacity Directional Airflow Panels


The DirectAire® AL is an all aluminum airflow panel that provides the same directional airflow benefits of the steel DirectAire. This allows the panel to provide similar cooling capacities with a panel that is 40% lighter.

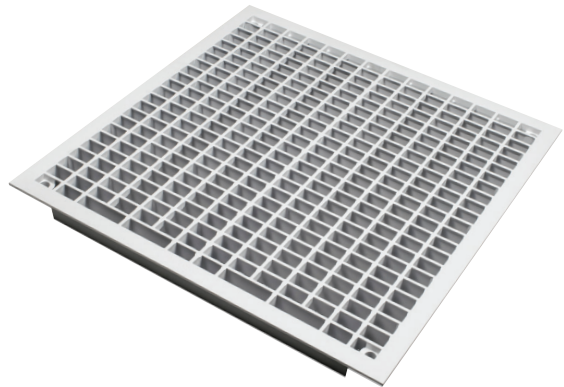



2775 CFM @ .10" H2O

Profile

Top View

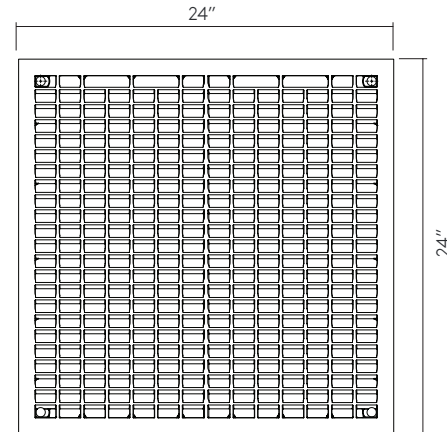

Side View



Key Performance Characteristics

- Die-cast aluminum construction
- 40% lighter than a steel DirectAire
- 60% open area provides 2,775 CFM @ .1" H2O
- 1,500 lbs design load
- 1,250 lbs 10 pass rolling load capacity
- Surface adjustable and automatic damper options
- Available in 24" and 60 cm panel sizes

Load Performance Chart*

Airflow Panel	Understructure	System Weight (lbs/sqft)	Static Loads (lbs)			Rolling Loads (lbs)		Impact Load (lbs)	Open Area (%)
			Design Load	Safety Factor	Ultimate Load	10 Passes	10,000 Passes		
DirectAire® AL	Bolted Stringer	7.9 (38.6 kg/m ²)	1500 (6.7 kN)	Min. > 2	>2500 (11.12 kN)	1250 (5.6 kN)	1000 (4.4 kN)	150 (68 kg)	60

All tests are performed using Cisca's Recommended Test Procedures for Access Floors with the exception of Design Load.

1. System Design Load is based on permanent set $\leq 0.010"$ and is verified by loading panels in accordance with the Cisca concentrated load method but with panels installed on actual understructure instead of steel blocks. Ultimate, Rolling, and Impact Load tests are performed using Cisca Test Procedures.
2. Safety Factor is Ultimate Load divided by Design Load.

CFM

Airflow Control	0.02" H ₂ O (5 Pa)	0.04" H ₂ O (10 Pa)	0.06" H ₂ O (15 Pa)	0.08" H ₂ O (20 Pa)	0.10" H ₂ O (25 Pa)
	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)
w/o Damper	1155 (545)	1730 (815)	2050 (965)	2380 (1125)	2775 (1310)
w/OBD	990 (465)	1465 (690)	1750 (825)	2035 (960)	2325 (1095)
w/PA Quad	2035 (960)	2110 (995)	2145 (1010)	2155 (1015)	2160 (1020)



AccessFloorSystems.com

800 868-8606

Airflow Panels & Controls

DirectAire® AL Airflow Controls

Opposed Blade Damper (OBD)

Tate's Single-Zone Opposed Blade Damper offers a dramatic airflow improvement over traditional manual slide dampers. It features a nearly infinite range of adjustment and very little airflow resistance. Easy access through the panel's surface allows for quick adjustment of airflow balancing to IT hardware.



Opposed Blade Damper for use with DirectAire®, DirectAire® AI, DirectPerf 32% and GrateAire® Panels

Multi-Zone Opposed Blade Damper

Tate's Multi-Zone Opposed Blade Damper enables the airflow delivery to be balanced based on the specific load in the rack. The damper allows data center operators to individually adjust airflow to three zones within the rack – top, middle and bottom.



Multi-Zone Opposed Blade Damper for use with DirectAire®, DirectAire® AI or DirectPerf 32% Panels

Key Performance Characteristics

- Provides more airflow at 100% open than slide dampers
- Easily adjustable from above without panel removal
- Field-mounted design available for DirectAire AI

Key Performance Characteristics

- Can reduce cooling energy usage
- For use with full or partial loaded racks
- Provides more granular airflow control
- Easily adjustable from above without panel removal
- Field-mounted design available for DirectAire AI

PowerAire® Quad Fan Assisted Airflow Controls

The PowerAire® Quad is equipped with 4 fans connected in parallel to provide built-in redundancy. This unit is only 4" deep making it ideal for retrofit situations with finished floor heights as low as 7.5".

Key Performance Characteristics

- Zero maintenance
- Installation can be carried out by IT staff
- Multiple control options available
- User programmable set point
- EC fan technology is variable from 0-100%
- Available in 100-120 V or 200-240 V power options
- Viewable Peak Temp for walk-through check of racks
- Available Auto Transfer Switch offers A/B power feed
- 24" and 60 cm raised floor compatible

