


# 24" X 24" GLASS PANEL



- A. Construction to be as follows.
  - Extruded aluminum angle welded at corners to make a 24"x24" frame.
  - Triple layer tempered clear glass with two (2) .060 CI PVB (anti-fracture) interlayers.
  - Glass to be set into frame & secured with clear silicone caulk.
- B. Loading to be 1500 lbs concentrated, anywhere on the panel, with a 1"x1" indenter.
- C. Panel to be fully interchangeable with solid panels, on Tate "Red Lion" bolted stringer grid, without modification of understructure.

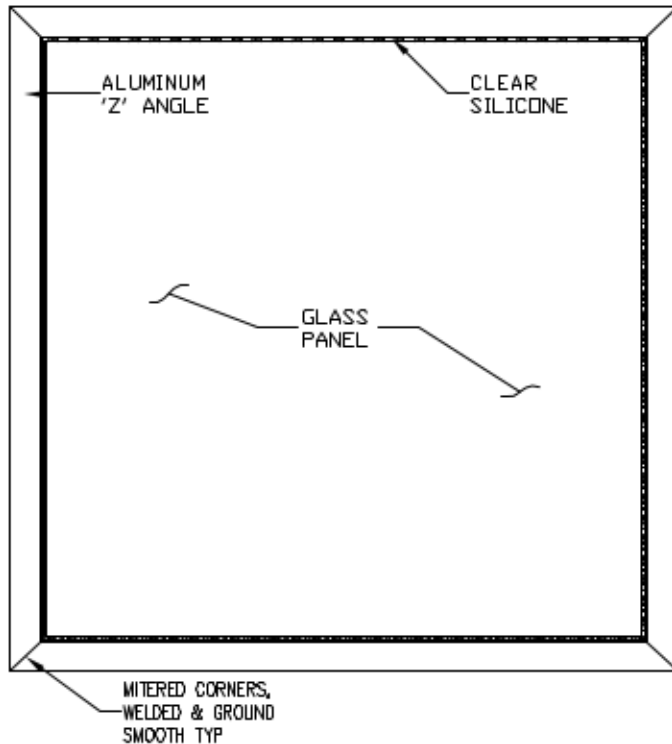